


SMART Board™ Interactive Whiteboard Setup with Serial Cable

NOTE: The instructions below are for the SMART Board interactive whiteboard 500 series and apply to both a desktop and a laptop computer.

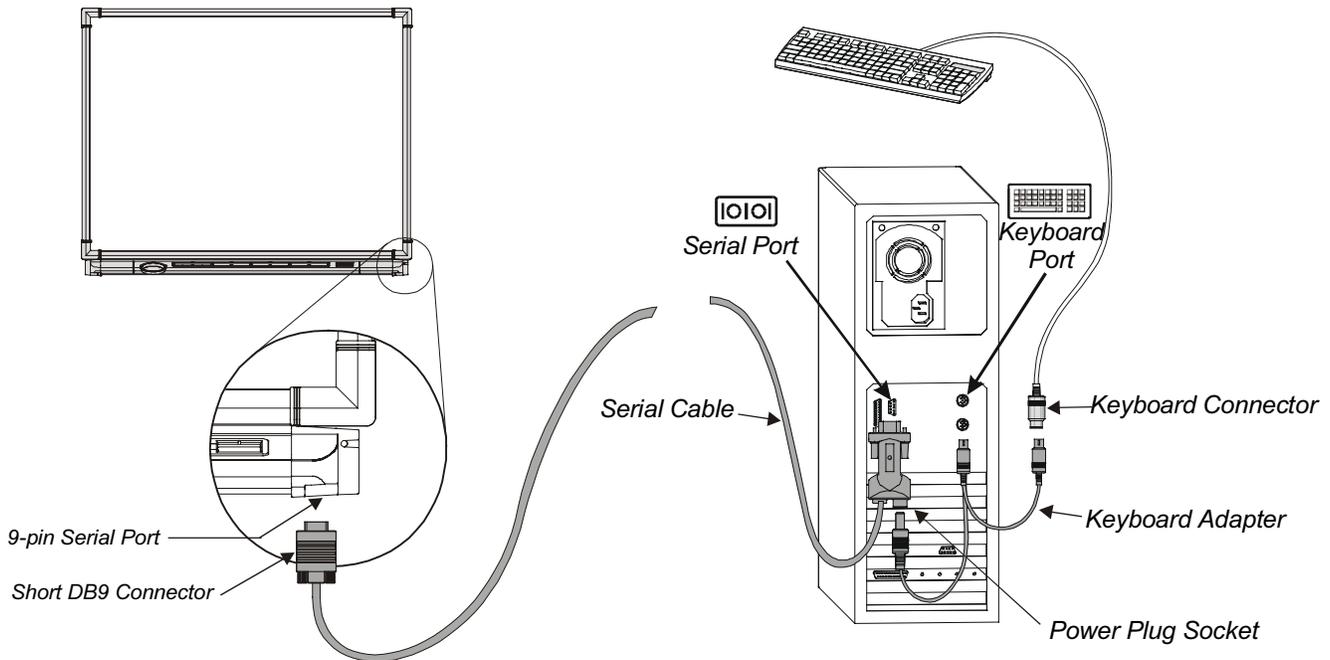

Connecting the SMART Board Interactive Whiteboard to Your Computer

1 To install SMART Board software, insert the CD-ROM that came with your SMART Board interactive whiteboard and follow the on-screen instructions. If you don't have a CD-ROM, or if you're not sure whether your CD-ROM is for the latest version of SMART Board software, you can download the latest version of the software from <http://www.smarttech.com/support/software/index.asp>.

2 Shut off your computer. Do not remove the SMART Board software CD-ROM.

3 Insert the serial cable's short DB9 connector into the 9-pin serial port under the lower-right side of the interactive whiteboard and tighten the screws.

4 Insert the long DB9 connector (at the other end of the cable) into an available serial port on the back of your computer and tighten the screws.

NOTE: If you're connecting the whiteboard to a laptop, skip to step 8 and insert an external power supply into the back of the long DB9 connector.

5 Unplug your keyboard connector and reconnect it to the keyboard adapter.

6 Insert the male end of the keyboard adapter into the keyboard port on your computer.

7 Insert the power plug of the keyboard adapter into the back of the long DB9 connector that was connected in step 4.


8 Turn on the computer. Check that the Ready Light on the right side of the SMART Pen Tray turns red, indicating that the pen tray is on. If this light fails to turn red, verify that all connections are made as indicated above.

9 When the Microsoft® Windows® operating system starts, a *Found New Hardware* wizard will appear. Follow the on-screen instructions to search your hard drive for the SMART Board driver.

10 If the SMART Board icon  does not appear in your Windows System Tray, select **Start, Programs, SMART Board Software**, and select **SMART Board Tools**.

Selecting a COM Port

- 1 Double-click the SMART Board icon  in the System Tray and press the **Control Panel** button. The *SMART Board Control Panel* dialog will appear.
- 2 Ensure all hardware components are connected and press the **Connect** button.
- 3 Press the **Detect SMART Hardware** button.

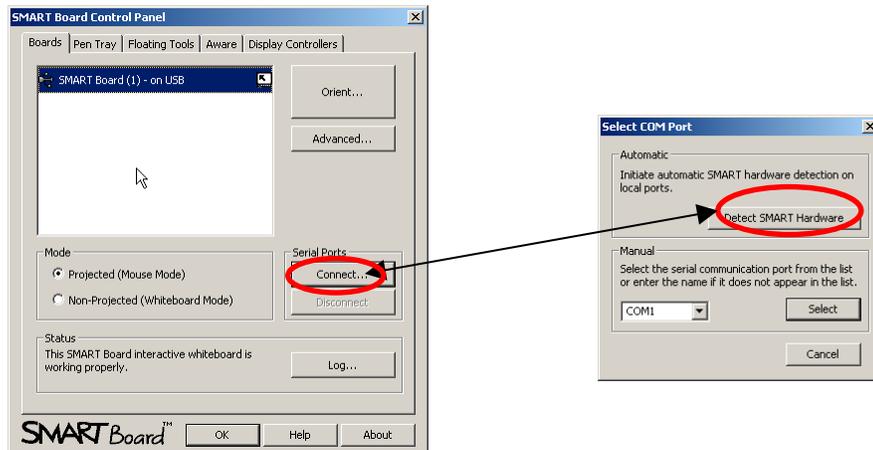

- 4 Press the **OK** button. The Ready Light on the pen tray will turn from red to green, indicating that the interactive whiteboard and the computer have established communication.

Orienting the SMART Board Interactive Whiteboard

You must orient the interactive whiteboard upon initial installation or if your whiteboard or projector has been moved or jostled. Ensure the projector, computer and SMART Board software are running.

- 1 Double-click the SMART Board icon  in the System Tray and press the **Orient** button.



- 2 Begin orientation at the upper-left corner. Press your finger or stylus squarely on the yellow center of each red cross in the order specified by the white diamond-shaped background.

